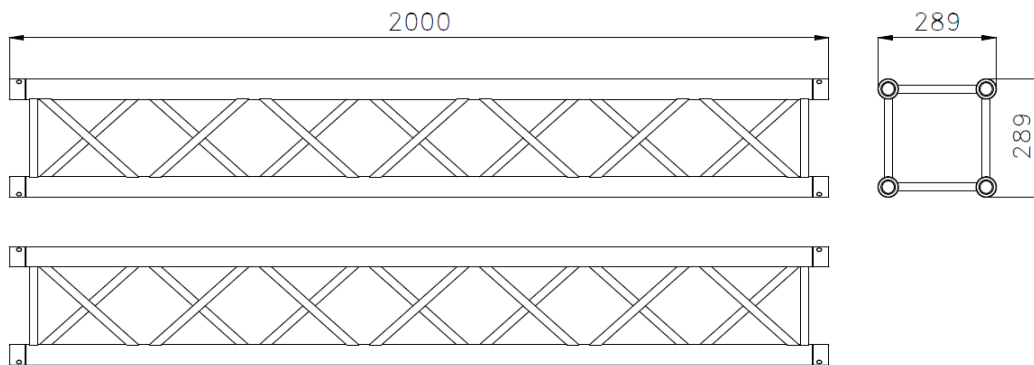
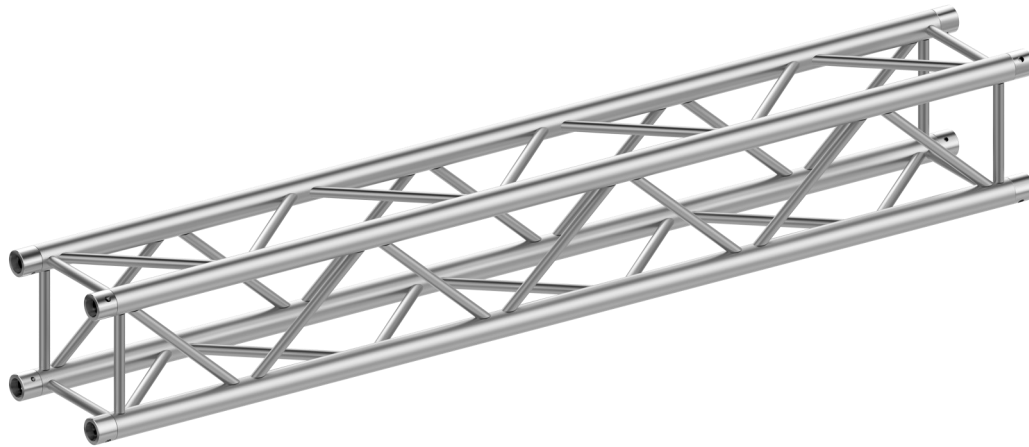


B30QH

Heavy Duty square truss 29cm side, bushing connection for conical spigots

Traliccio quadro sezione 29cm HD connessione a boccia per giunto conico


STRAIGHTS - LINEARI [Kg]

B30QH 050	L= 50cm	6,0
B30QH 100	L= 100cm	9,5
B30QH 150	L= 150cm	12,8
B30QH 200	L= 200cm	16,3
B30QH 250	L= 250cm	19,6
B30QH H 300	L= 300cm	23,0
B30QH 350	L= 350cm	26,4
B30QH 400	L= 400cm	29,8
BQKS	(coupling set)	0,8

SPAN - CAMPATA

Lenght	UDL	CPL	Defl.
[m]	[kg/m]	[kg]	[cm]
4	600	1100	1,7
6	335	1005	3,2
8	182	728	5,0
10	111	555	8,8
12	73	435	13,8
14	49	345	19,9
16	34	274	27,0
18	24	215	35,3
20	17	165	44,7

CANTILEVER - TRALICCIO A SBALZO

Lenght	UDL	CPL
[m]	[kg/m]	[kg]
1	2000	1348
2	673	673
3	298	448
4	167	335
5	107	267
6	74	221

Main Tubes - Tubi Correnti: EN AW-6082 T6 Ø50x3mm

Diagonals - Diagonali: EN AW-6082 T6 Ø20x2mm

Bushings - Boccole: EN AW-6082 T6

Coupling Set - Set di connessione:



UDL, Uniformly Distributed Load - CPL, Centred Point Load - Defl., Deflection

