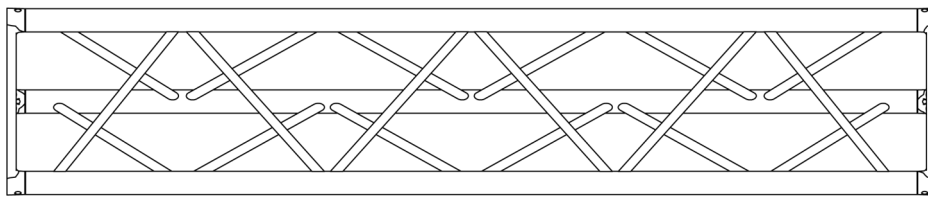

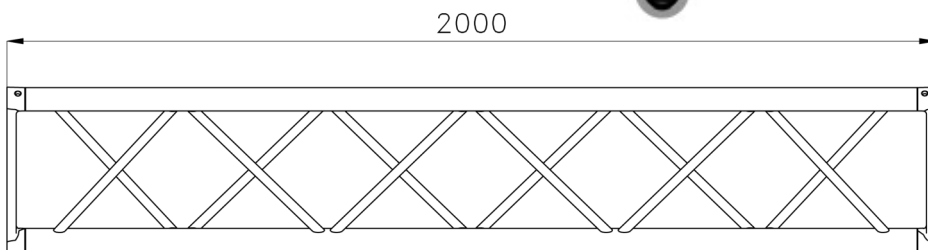
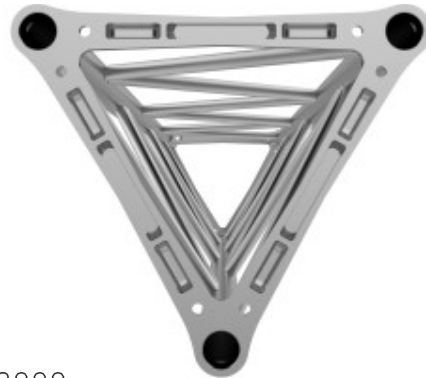


P40T

40cm side aluminium triangular truss plate connection for conical spigots and bolts

Traliccio trio sezione 40cm, connessione a piastra per giunto conico e bulloni


STRAIGHTS - LINEARI [Kg]

P40T 050	L= 50cm	5,2
P40T 100	L= 100cm	7,4
P40T 150	L= 150cm	9,7
P40T200	L= 200cm	11,9
P40T 250	L= 250cm	14,2
P40T 300	L= 300cm	16,3
P40T 350	L= 350cm	18,5
P40T 400	L= 400cm	21,1
P40T 050	(coupling set)	0,7

SPAN - CAMPATA

Lenght	UDL	CPL	Defl.
[m]	[kg/m]	[kg]	[cm]
3	298	580	1,5
4	288	576	1,2
5	206	476	1,9
6	125	376	2,6
7	96	324	3,6
8	68	273	4,7
9	55	241	5,9
10	42	210	7,3
11	35	187	8,9
12	28	165	10,5
13	23	149	12,4
14	19	133	14,3
15	16	120	16,4
16	13	107	18,6

CANTILEVER - TRALICCIO A SBALZO

Lenght	UDL	CPL	Defl.
[m]	[kg/m]	[kg]	[cm]
1	880	440	0,7
2	220	220	3,9
3	98	147	8,2
4	55	110	14,9
5	35	88	22,8

Main Tubes - Tubi Correnti: EN AW-6082 T6 Ø50x2mm

Diagonals - Diagonali: EN AW-6082 T6 Ø20x2mm

Plates - Piastre: EN AC-42200 T6

Coupling Set - Set di connessione: PT KS - PT K10



UDL, Uniformly Distributed Load - CPL, Centred Point Load - Defl., Deflection

