


P30T

29cm side aluminium triangular truss plate connection for conical spigots and bolts

Traliccio trio sezione 29cm, connessione a piastra per giunto conico e bulloni

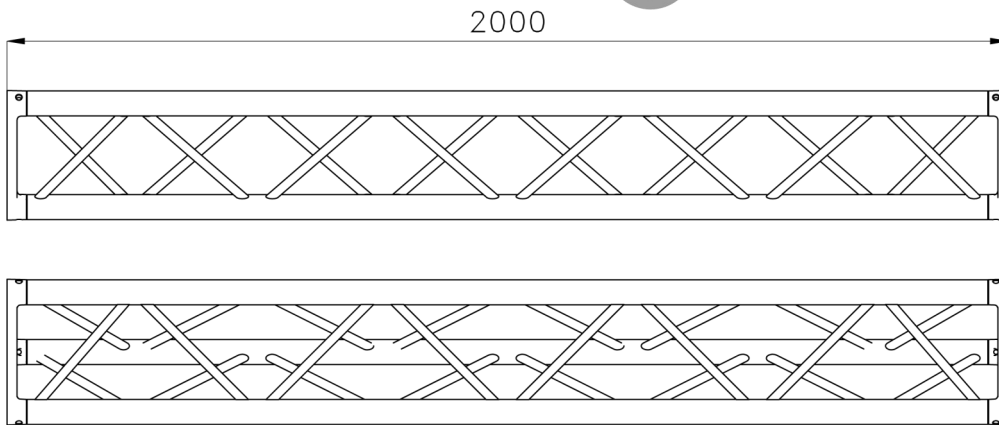

STRAIGHTS - LINEARI		[Kg]
P30T 050	L= 50cm	3,9
P30T 100	L= 100cm	5,9
P30T 150	L= 150cm	7,9
P30T 200	L= 200cm	10
P30T 250	L= 250cm	12
P30T 300	L= 300cm	14
P30T 350	L= 350cm	16
P30T 400	L= 400cm	18
PTKS	(coupling set)	0,7

SPAN - CAMPATA			
Lenght	UDL	CPL	Defl.
[m]	[kg/m]	[kg]	[cm]
3	254	489	1,1
4	227	454	1,2
5	162	374	1,8
6	97	293	3,1
7	75	251	4,4
8	52	209	5,8
9	42	183	7,2
10	31	156	8,4
11	25	138	10,7
12	19	105	12,8
13	16	98	15,6
14	13	91	18,3
15	11	80	20,2
16	9	68	22,1

CANTILEVER - TRALICCIO A SBALZO			
Lenght	UDL	CPL	Defl.
[m]	[kg/m]	[kg]	[cm]
1	880	440	0,7
2	220	220	3,9
3	98	147	8,2
4	55	110	14,9
5	35	88	22,8

Main Tubes - Tubi Correnti: EN AW-6082 T6 Ø50x2mm

Diagonals - Diagonali: EN AW-6082 T6 Ø18x2mm

Plates - Piastre: EN AC-42200 T6

Coupling Set - Set di connessione: PT KS - PT K10



UDL, Uniformly Distributed Load - CPL, Centred Point Load - Defl., Deflection

