
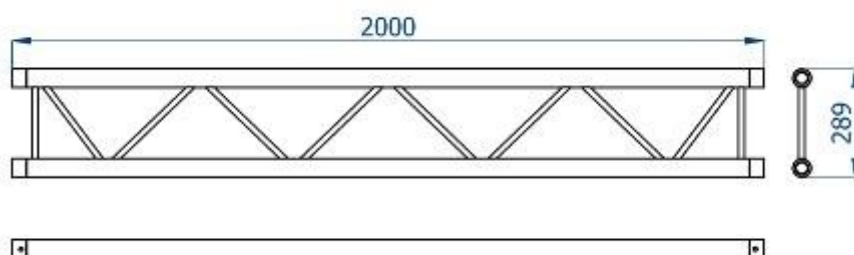


B30L

Ladder truss 29cm side, bushing connection for conical spigots

Traliccio duo sezione 29cm, connessione a boccola per giunto conico

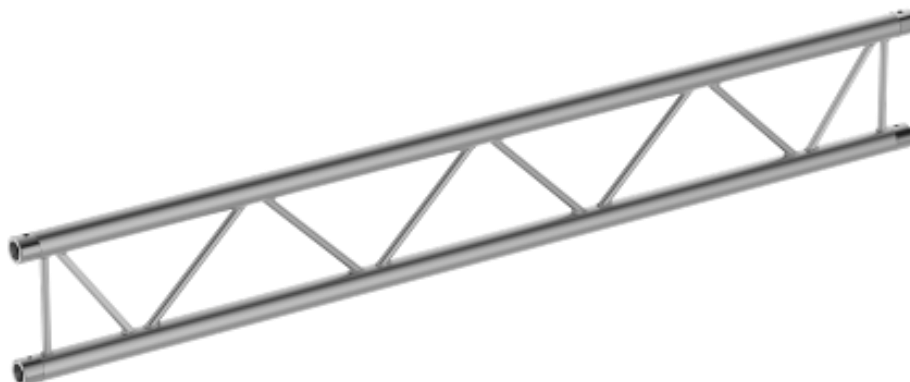

STRAIGHTS - LINEARI [Kg]

B30L 050	L= 50cm	2,5
B30L 100	L= 100cm	3,7
B30L 150	L= 150cm	4,9
B30L 200	L= 200cm	6,1
B30L 250	L= 250cm	7,4
B30L 300	L= 300cm	8,6
B30L 350	L= 350cm	9,8
B30L 400	L= 400cm	11,0
PLKS	(coupling set)	0,4

CORNERS - ANGOLI [Kg]

B30L 2L90V	2V 90° Vertical	2,9
B30L 2L90	2V 90° Horiz.	3,4
B30L 3L	3V 90°	4,9
B30L 3T	3V 90° - T	4,9
B30L 4T	4V 90° - T	6,3
B30L 4X	4V 90°	6,15

SPAN - CAMPATA

Lenght [m]	UDL [kg/m]	CPL [kg]	Defl. [cm]
4	110	220	0,9
5	79	180	1,3
6	48	145	2,1
7	37	125	2,5
8	26	105	3,8
9	21	94	4,7
10	16	80	6,2
11	13	72	8,5
12	11	64	9,6

Main Tubes - Tubi Correnti: EN AW-6082 T6 Ø50x2mm

Diagonals - Diagonali: EN AW-6082 T6 Ø20x2mm

Bushings - Boccole: EN AW-6082 T6

Coupling Set - Set di connessione:



UDL, Uniformly Distributed Load - CPL, Centred Point Load - Defl., Deflection