


PR40

Aluminium Peak Roof with 40 cm side main trusses, tower 30 or 40 cm side.

Copertura a due falde, traliccio perimetrale sezione 40cm, torre sezione 30 or 40 cm

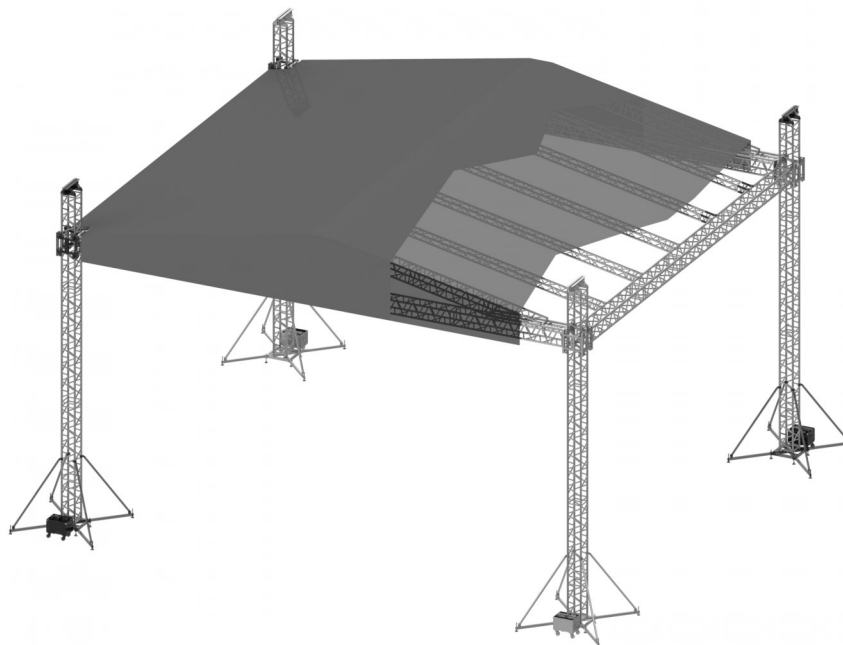

LOADING CAPACITY INDICATIONS (calculated without wind)

PORTATA (calcolata senza vento)

Code	Dimensions [m]	Capacity with 30cm towers [kg]	Capacity with 40cm towers [kg]
PR40 1210	12x10	3668	3668
PR40 1008	10x8	4650	5200
PR40 0806	8x6	4650	5200

INTERNAL DIMENSIONS (towers excluded)

DIMENSIONI INTERNE (torri escluse)

Type [m]	Front [m]	Side [m]	Tower 30 Height [m]	Tower 40 Height [m]
12x10	12,30	10,30	7,0	9,0
10x8	10,30	8,30	7,0	9,0
8x6	8,30	6,30	7,0	9,0

Composed by:

Heavy Duty 30 or 40 towers
Heavy Duty 40 main ring trusses
Pvc ceiling

Composta da

Torre sezione 30 o 40 Heavy Duty
Traliccio perimetrale Heavy Duty 40
Telo in PVC

Main Tubes - Tubi Correnti: EN AW-6082 T6 \varnothing 50x3mm

Diagonals - Diagonali: EN AW-6082 T6 \varnothing 20x2mm

Busching- Boccole: EN AW-6082